

5 YEARS
warranty

FOR LEISURE USE ONLY
Subject to terms and conditions
see your Dealer for more
information

QuattroT
XSR


QuattroT



f Selva Marine Hrvatska
i Selva Marine Hrvatska



**OUTBOARD
MOTORS**

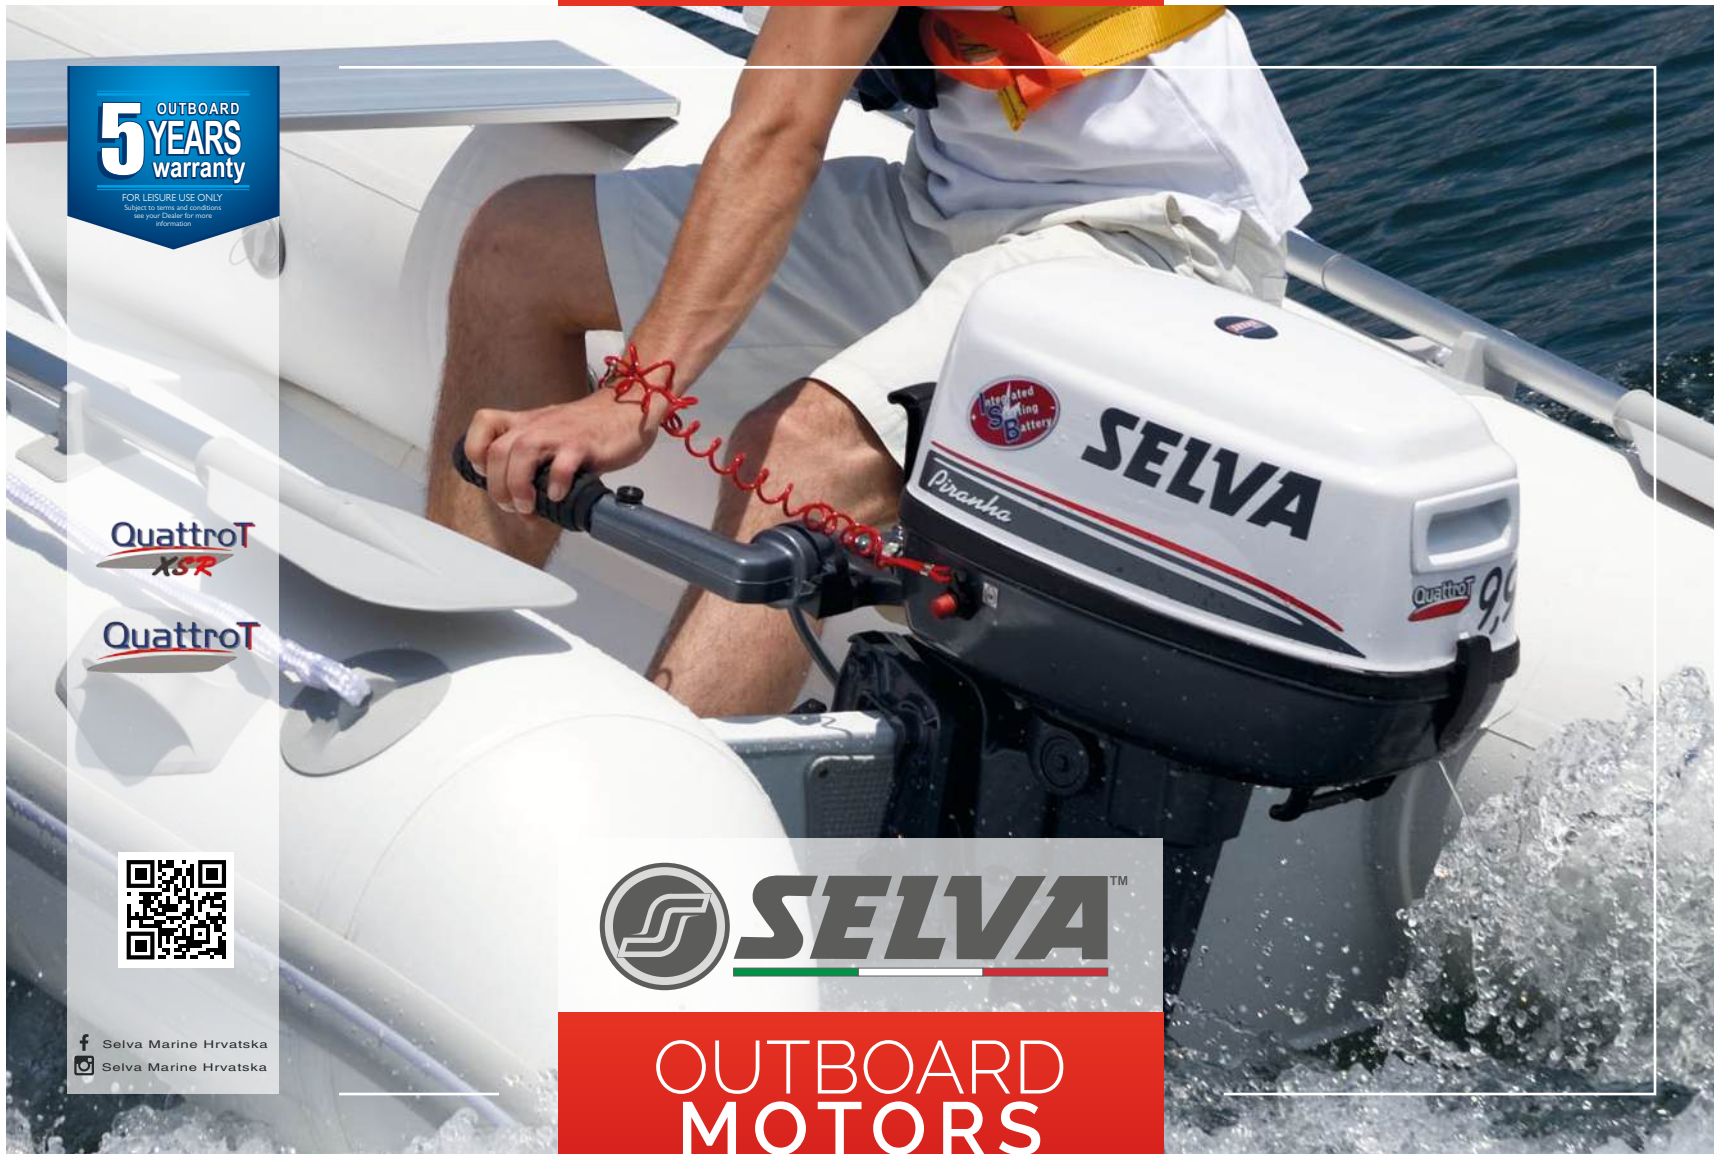

Guppy

2.5



Sea Bass

4/5



Sea Bass

6



Oyster

6



TECHNICAL CHARACTERISTICS

Model	GUPPY	SEA BASS			OYSTER
Power (hp)	2,5	4	5	6	6
Power (kW)	1.84	2.9	3.7	4.4	4.4
Max. R.P.M.	4500 / 5500	5000 / 5500			
Motor type	4 temps OHV	4 temps SOHC			
Swept volume c.c.	87	118			135
Bore x Stroke (mm)	54 x 38	56 x 48			57 x 53
N° Cylinders	1				
Induction	1 carburettor				
Choke	Manual				
Fuel	Petrol (for specifications see the user manual)				
Fuel tank (L)	Integrated 0.9	Separate 1.2 or Integrated 1.6		Separate 1.2 or Integrated 1.8	
Lubrication	Forced	Automatic oil injection into fuel			Forced with mechanical lobe-pump
Ignition	C.D.I. Digital				
Ignition timing	Electronic				
Starting	Manual				
Alternator	Not available	Optional 12V/70W with rectifier			
Cooling	Water cooled with pump-forced circulation				
Exhaust	Underwater	Underwater through propeller			
Steering system	Tiller bar steering with twist grip throttle control and steering friction adjustment				
Trim adjustment	Manual (4 pos)	Manual (4 pos) with trim for navigation in shallow waters			
Gears	Mechanical A-F + 360° shaft rotation	Mechanical F-N-R + 360° shaft rotation			
Transmission ratio	13 / 28				13 / 30
Available shaft versions	C.				C - L
Standard propeller type	3-bladed	3-bladed with built-in spring drive			
Weight basic version (Kg)	13.5	23			27

Some models may not be available in all countries, or they may have different, non-standard horse powers. Depending on the different national legislative requirements. (For further details consult the current price list).

The data contained in this table are to be considered as approximate and **Selva Marine** reserves the right to modify the technical characteristics, materials, construction, weights, etc. without any forewarning or obligations.

Oyster B.F.

6



Oyster B.F. Sail

6



Black Bass

8



TECHNICAL CHARACTERISTICS

Black Bass B.F.

8



Model	OYSTER BIG FOOT	OYSTER BIG FOOT SAIL	BLACK BASS	BLACK BASS BIG FOOT
Power (hp)	6	6	8	8
Power (kW)	4.4	4.4	5.9	5.9
Max. R.P.M.	5500 / 6000			
Motor type	4 Stroke SOHC			
Swept volume c.c.	135		165	
Bore x Stroke (mm)	57 x 53		63 x 53	
N° Cylinders	1			
Induction	1 carburettor			
Choke	Manual or Electrical		Manual	Manual or Electrical
Fuel	Petrol (for specifications see the user manual)			
Fuel tank (L)	Separate 12		Separate 12 or built-in 1.8	Separate 12
Lubrication	Forced with mechanical lobe-pump			
Ignition	C.D.I. Digital			
Ignition timing	Electronic			
Starting	Manual or Electric also with integrated ISB battery (not available in versions with built-in tank)			
Alternator	Optional 12V/70W with rectifier on Manual start version Standard 12V/70W with rectifier on Electric start version			
Cooling	Water cooled with pump-forced circulation			
Exhaust	Underwater through propeller			
Steering system	Tiller bar steering with twist grip throttle control and steering friction adjustment or remote with remote control box		Tiller bar steering with twist grip throttle control and steering friction adjustment	Tiller bar steering with twist grip throttle control and steering friction adjustment or remote with remote control box
Type of remote control box provided (for the version with remote control box)	Single lever with safety switch		Not applicable	Single lever with safety switch
Trim adjustment	Manual (4 pos) with trim for navigation in shallow waters			
Gears	Mechanical F-N-R		Mechanical F-N-R + 360° shaft rotation	Mechanical F-N-R
Transmission Ratio	13 / 27		13 / 30	13 / 27
Available shaft versions	C. - L	XL		C. - L
Standard propeller type	3-bladed with built-in spring drive			
Weight basic version (kg)	30.5	32	27	30.5

Certains modes peuvent ne pas être disponibles dans certains pays, ou peuvent avoir des puissances différentes, non standard, en fonction des lois nationales en vigueur (pour de plus amples informations consultez la liste des prix en vigueur).

Les données figurant dans ce tableau doivent être considérées comme approximatives, Selva Marine se réservant le droit de modifier les caractéristiques techniques, les matériaux, la construction, les poids, couleurs et les graphiques, sans avertissement préalable ni obligations.

Black Bass

B.F. Sail

8



Ray

8



Piranha

9.9



TECHNICAL CHARACTERISTICS

Piranha Sail

9.9



Model	BLACK BASS BIG FOOT SAIL	RAY	PIRANHA	PIRANHA SAIL
Power (Hp)	8	8	9.9	9.9
Power (kW)	5.9	5.9	7.3	7.3
Max. R.P.M.	5500 / 6000	5000 / 6000	5500 / 6000	
Motor type	4 Stroke SOHC			
Swept volume c.c.	165	212	181	
Bore x Stroke (mm)	63 x 53	56 x 43	66 x 53	
N° Cylinders	1	2 in-line	1	
Induction	1 carburettor			
Choke	Manual or Electrical	Manual	Manual or Electrical	
Fuel	Petrol (for specifications see the user manual)			
Fuel tank (L)	Separate 12			
Lubrication	Forced with mechanical lobe-pump	Forced (oil sump)	Forced with mechanical lobe-pump	
Ignition	C.D.I. digitale	C.D.I. Micro-computer	C.D.I. digitale	
Ignition timing	Electronic			
Starting	Manual or Electrical also with integrated ISB battery	Manual	Manual or Electrical also with integrated ISB battery	
Alternator	Optional 12V/70W with rectifier on Manual start version Standard 12V/70W with rectifier on Electric start version	Standard 12V/70W (regulator optional)	Optional 12V / 70W with regulator (A. M.) Standard 12V / 70W with regulator (A.E.)	
Cooling	Water cooled with pump-forced circulation			
Exhaust	Underwater through propeller			
Steering system	Tiller bar steering with twist grip throttle control and steering friction adjustment or remote with remote control box	Tiller bar steering with twist grip throttle control and steering friction adjustment	Tiller bar steering with twist grip throttle control and steering friction adjustment	
Type of remote control box provided (for the version with remote control box)	Single lever with safety switch	Accessory, Single lever	Single lever with safety switch	
Trim adjustment	Manual (4 pos) with trim for navigation in shallow waters			
Gears	Mechanical F-N-R			
Transmission Ratio	13 / 27			
Available shaft versions	XL	C.- L.		XL
Standard propeller type	3-bladed with built-in spring drive			
Weight basic version (kg)	32	39.9	30.5	32

Some models may not be available in all countries, or they may have different, non-standard horse powers. Depending on the different national legislative requirements. (For further details consult the current price list).

The data contained in this table are to be considered as approximate and Selva Marine reserves the right to modify the technical characteristics, materials, construction, weights, etc. without any forewarning or obligations.



SELVA MARINE HRVATSKA
PLATTNER CROATIA D.O.O.
ZAGREBAČKA CESTA 143A,
10000 ZAGREB, HRVATSKA
GSM: +385 (0) 91 6169 368
TEL: +385 (1) 23 49 333

www.selvamarine.hr

